


AL 12/25 - ALCC electric pumps

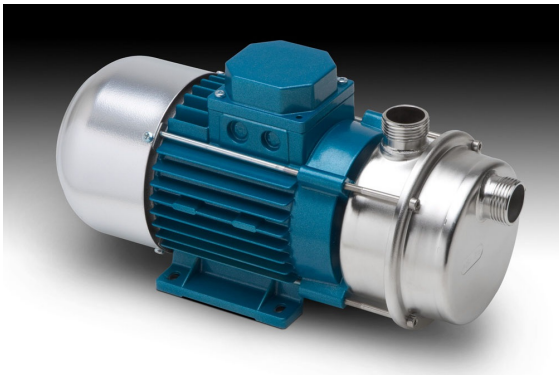

The best solution for the suction and transfer of liquids, thanks to the strong self-priming capacity and the ability to run even with discontinuous presence of the liquid in suction. The ALCC series, entirely made of AISI 316 stainless steel with a unidirectional DC motor (12 or 24 Volt) is used when batteries are available as a power source. For each application, it is necessary to check the suitability and choose appropriate gaskets.

The product are particularly suitable for use:

- food industry (oil, vinegar, brine, fruit juice, beer wort, milk)
- chemical industry (corrosive liquids)
- nautical (bilge, services, cooling, washing, sea water)
- agriculture (fungicides, liquid fertilizers, components on agricultural machinery, irrigation)
- transports (tankers, road machines, on board water systems)

Hydraulic specifications

- Maximum capacity : 58 lt/min
- Maximum head : 11 m
- Gasket on the shaft: Mechanical gasket
- Maximum priming height : 6 m
- Threaded ports: 1"
- Maximum liquid density 1.1g/cm³ free of hard particles in suspension
- Maximum temperature 90°C
- Not suitable for aggressive liquids towards pump construction materials and gaskets (see technical specifications)
- Not appropriate for the transfer of petrol, solvents and, in general, in environments with risk of explosion and fire
- Unidirectional pumping flow
- Coupling with impeller locked
- Possibility of working for short periods with closed pipes
- During installation, the pump must be filled with liquid, subsequently this operation is no longer necessary

Technical specifications

Material


- Pump Parts: AISI 316
- Shaft : AISI 316
- Impeller : AISI 316
- Gaskets: NBR
- Mechanical gasket ceramic/graphite/nbr

MOTOR


- Powered By A Motor Dc motor 12V
- equipped with mec engine 71 a 1700 g/min from 0.6 HP/ 0,4 KW
- Service S1
- Ip protection degree 23
- Insulation class F
- Power supply connection via terminal board on the motor

Pump features				
Ports	Hose fitting	Priming ability	Qmax	Hmax
1"	25 mm	6 m	58 lt/min	11 m

Overall dimensions				
W	L	H	Weight	Leq A*
355 mm	144 mm	176 mm	8.8 kg	75 dB

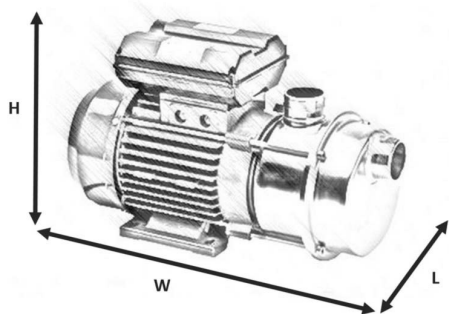

Capacity (l/min)		
1m	5m	10m
55 lt/min	36 lt/min	9 lt/min

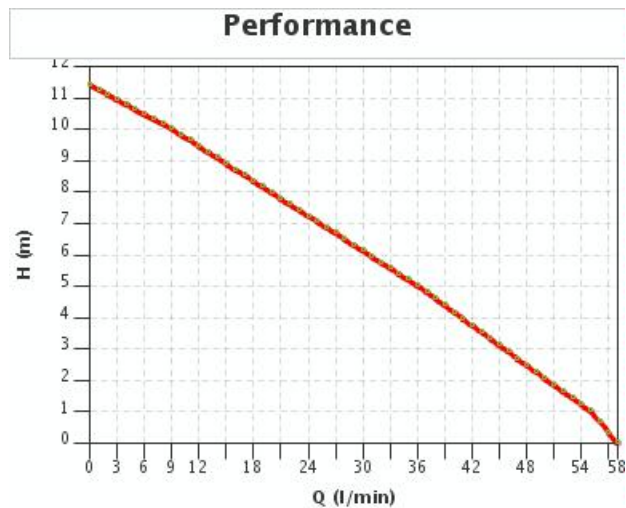

Characteristics referring to operation with water at 20 °
 * Leq A detected 1 meter from the pump surface

Available for the hydraulic part on request

- [By-pass inox 25](#)
- Quick disassembly pump

FOR USE AND TRANSPORT

- Feet for ceiling fixing
- Feet for fixing to: wall
- [Plate with stainless steel handle](#)
- [Stainless steel trolley](#)

Liquid loading / unloading

- Drain valve 1/4
- Drain valve 1/8
- Drain valve DIN 10
- [Drain valve](#)

Liquids loading / unloading

- [Drain plug](#)

PIPE FITTINGS

- Plastic fittings 25
- Stainless steel fittings 25

SEALS

- EPDM
- Teflon
- Viton

SPECIAL PORTS

- [Ports clamp DN 25](#)
- [Ports DIN 25](#)
- [Ports Macon 40 for AL 25](#)

TELLARINI POMPE di G. Tellarini & C.

Via E. Maiorana, 4 - 48022 Lugo (Ravenna) Italy - Tel. +39 0545 22508 - Fax +39 0545 32362
<https://www.tellarini.com> - Email: tellarini@tellarini.com - sales@tellarini.com

We reserve the right to make changes without prior notice.

TELLARINI POMPE di G. Tellarini & C.

Via E. Maiorana, 4 - 48022 Lugo (Ravenna) Italy - Tel. +39 0545 22508 - Fax +39 0545 32362
<https://www.tellarini.com> - Email: tellarini@tellarini.com - sales@tellarini.com