

BOXER-50



STANDARD: II 3/3G D IIB T 135°C (zona 2)
 CONDUCT: II 2/2GD c IIB T 135°C (zona 1)



BOXER 50 ALU



PP





PVDF



INOX

CARACTERISTICAS TECNICAS technical characteristics

Empalmes aspiración/impulsión Instake/delivery connections	G 1/2" f (standard)	
Empalme aire Air connection	G 3/8" f	
Capacidad de aspiración en seco max Max self-priming capacity	5 m	
Caudal max Max flow rate	50 l/min	
Altura de elevación máx. Max head	70 m	
Presión aire alimentación max Max air supply pressure	7 bar	
Ø max paso de sólidos Ø max od passing solids	4 mm	
Material Material	Peso Weight	Temp. Max de servicio Max service temperature
ALU	4 kg	95 °C
PP	3,6 kg	60 °C
PVDF	4,2 kg	95 °C
Aisi-316	6,5 kg	95 °C

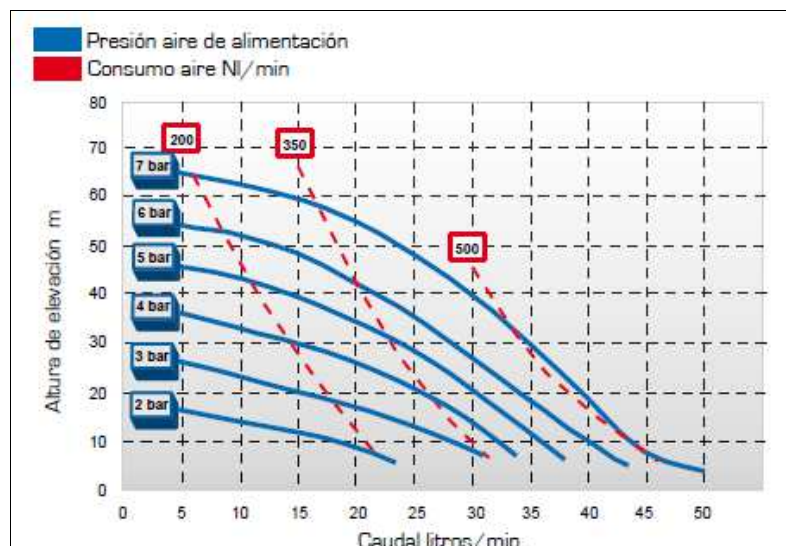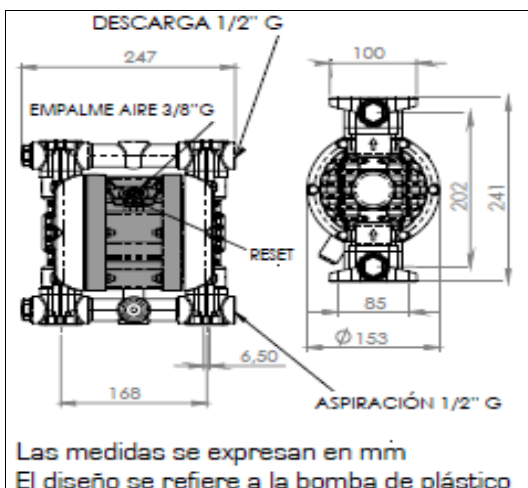

BOXER-50